



CONSTRUCTION DISTRIBUTOR CATALOG

Build a Stronger Business with Spectra Precision Products

The Broadest Line


From lasers to construction accessories, Spectra Precision Laser has more choices for your customer. Better choices, too, because we build our products to be the toughest on earth.

An Entire Industry. Invented Here.

There's a reason Spectra Precision Laser is the strongest name in the industry. We invented the industry. From day one, we have pioneered every major development in laser positioning for construction. That's why you'll find our products on more job sites around the world than any other brand.

A Partnership for Success

We can help you grow your business. We have the breadth of products, the quality and the support you demand... and the attitude to do whatever it takes to make you more successful.



www.spectralasers.com

Contact Information:

TRIMBLE / PRECISION TOOLS
5475 Kellenburger Road
Dayton, Ohio 45424 U.S.A.
(888) 527-3771 (Toll Free in U.S.A.)
+1-937-245-5600 Phone
+1-937-245-5489 Fax

EUROPE
Trimble Kaiserslautern GmbH
Am Sportplatz 5
67661 Kaiserslautern
GERMANY
Tel +49-(0)6301-71 14 14
Fax +49-06301-32213

ASIA-PACIFIC
Spectra Precision Division
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 449269, Singapore
+65-6348-2212 Phone

Specifications subject to change without notice

©2017, Trimble Inc. All rights reserved. Trimble, the Globe & Triangle logo and Spectra Precision are trademarks of Trimble Inc., registered in the United States Patent and Trademark office and in other countries. All other trademarks are the property of their respective owners. PN 022507-296G (05/2017)



INTERIOR LASERS
LASER LEVELS
GRADE LASERS
MACHINE RECEIVERS
RECEIVERS
OPTICAL



Introduction

Warranty 4
Service 4
Timeline. 5

Lasers

Buying guide 6

Laser Levels

LL100N 9
LL300N. 10
LL300S. 11
LL500. 12

Horizontal and Vertical Lasers

HV101 13
HV302 14
HV302G 15

Grade Lasers

GL412N/GL422N 16
GL612N/GL622N 17
GL710, GL720, GL722 18

Universal Laser

UL633N 19

Pipe Lasers

DG613 20
DG813 21

Laser Receivers

HR150U 22
HR220 22
HR320 23
HL450 23
HL700 24
HL750 24
HL760/HL760U. 25
CR600 26

Optical Instruments

Electronic Fieldbook App 27
Automatic Level 28
DET-2 Construction Theodolite 29

Laser Tools

LP30, LP50. 30
LT20 31
LT52 32
LT56 33
LT58 34
QM55. 35
QM75. 35
QM95. 35

Interior Layout Systems

QML800/QML800G. 36

Machine Display Receivers

LR20 37
LR30 37
LR50 38
LR60 38
RD20 and Accessories 39

Accessories

Accessories - Lasers 40
Accessories - Tripods 41
Accessories - Grade Rods. 42

Specifications

Laser Levels, Display Receivers 43
Grade & Universal Lasers 44
Pipe Lasers 44
Laser Tools 44
HR/HL Laser Receivers 45
GL700 Series Lasers 45
Automatic Levels 46
Theodolite. 46
QM’s Quick Measure Lasers. 46
Laser Applications. 47



For more than 50 years Spectra Precision has been delivering time, cost and material savings on the job site through continual development and innovation. Our products help provide control for elevation, grade, vertical alignment and 90 degree layout for both interior and exterior construction. They are designed to withstand harsh jobsite conditions providing the confidence to know they are working when you are working and where you are working. That is why we offer industry leading warranty coverage that is supported by a worldwide network of distribution and service partners. They provide expert support and guidance to help you select the right solution for your needs.

In this catalog you will discover our latest products, with unique features, that make you more productive on a daily basis. All of the information in the catalog and more can be found on our dedicated mobile App – search for Spectra Laser on both Google Play store or Apple App Store. The App allows you to select the right product for your needs, has all the product videos available and provides access to product manuals and user guides all right there on your phone.

So go ahead browse through the catalog and see what we have to offer.

Warranty/Service
Shockproof Products Built for
the Construction Environment



Spectra Precision products are designed to be used in the tough construction environment where performance in arduous conditions is expected. Environmental conditions are often harsh, with water, mud and concrete being encountered on a daily basis. At Spectra Precision this is considered with every product. Products occasionally get dropped or knocked over; all Spectra Precision products that show the “Shockproof” icon are ruggedized and designed to withstand a 1m (3ft) drop onto concrete and tripod tip-over up to 1.5m (5ft) resulting in reduced downtime and lower repair costs.

Industry Leading Warranty and Service Support

The warranty program from Spectra Precision provides comprehensive coverage and simplicity. There are three options available depending on product:

- Standard Warranty – with 1, 3 or 5 year coverage
- “No Excuses” free over the counter exchange
- Supplemental Over the counter exchange

Standard warranty covers manufacturing fault and where any product has the “shockproof” warranty, parts and labour to repair the product are covered if it is dropped or knocked over within the specified heights.

Products shown as having “No-excuses” free over the counter exchange can be exchanged for a new product with any Spectra Precision dealer as long as the product is within the terms of warranty.

Supplemental over the counter exchange is an instant, over-the-counter exchange policy, which can be transacted worldwide by ANY Spectra Precision dealer without a receipt. Any product will be replaced that has failed due to normal use for the same price as a typical repair, with a NEW unit from your local dealer’s inventory for the specified period.

Worldwide Service Network

In addition to factory service centres in Dayton, OH, Kaiserslautern, Germany and Shanghai, China– where specialist reprogramming and component level repairs can be undertaken, Spectra Precision has a comprehensive worldwide approved service provider network with over 170 service centres. All authorised service providers are factory trained and take part in regular training to update their skills and knowledge. Each service provider invests in specialist equipment to make sure that all service and repairs are carried out to the highest standards.

What does this mean to the Spectra Precision user? – live, experienced service technicians are available via phone, email and in person during normal business hours all around the world whether it is for technical advice, service or repairs.



SCAN THIS CODE TO FIND
THE NEAREST SPECTRA
DEALER LOCATION NEAR YOU
AT SPECTRALASERS.COM



2016

QML800G

Green beam
QuickMark
layout system



2017

GL612N-GL622N

Versatile Automatic
Single and Dual
Grade Laser for
Level, Grade, and
Vertical Alignment



2002



DG711

pipe laser with anodized
aluminum housing

2008



LL100/HV101

new generation of fully
automatic lasers

2012



UL633

the MOST versatile
construction laser... EVER!

2016



DG613-DG813

Compact, tough and smart
pipe lasers


1965



Bob Studebaker

with the 1st rotating
laser in the world

1973

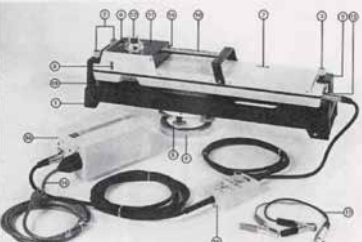

Rotolite

1st rotating laser
for interior work

1976



945U

1st electronic
automatic self-leveling
rotating laser with slope
adjustment

1981



EL-1

1st electronic
automatic
self-leveling
rotating laser
level with a
laser diode...
still produced.

1984



Pipemaster

1st pipe laser
with internal
battery and
infrared remote
control

Buying Guide

1. What do lasers do and how does that relate to what I need to do with them on the jobsite?

Simply, laser levels can provide a reference for:


- Horizontal Level
- Vertical Alignment
- Slope
- Automatic Grade
- 90 Degree Setting Out
- Plumb

Some lasers have only one of the features and some have all.

2. How does distance impact the way the laser functions?

Accuracy of the laser changes over distance. Over longer distances even the curvature of the Earth has an impact. Additionally the receiver you use can affect the accuracy. Depending on your requirements there are a number of things you can consider to improve accuracy.

- **Planelok** – a radio in the laser and the receiver, communicate and keep the laser beam locked to a fixed elevation or direction (in vertical). The laser works to keep the beam in a fixed position on the receiver. This not only improves accuracy but is best used for applications requiring higher accuracy such as concrete pads. This function can also eliminate beam drift that can be caused by vibrations or changing temperatures throughout the day.

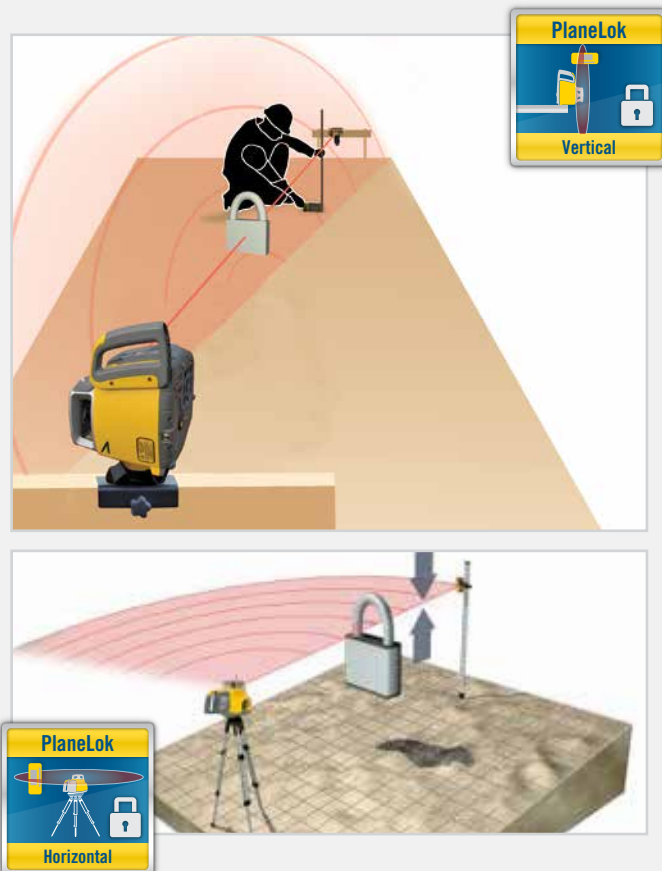

- **Tolerance Setting (Receivers)** - Tolerance is an accuracy setting on the receiver. Spectra Precision receivers allow tolerance adjustment from fine to rough level. This can be helpful, for example by using a wider tolerance while moving dirt and a narrow tolerance while doing concrete or other fine grade. Spectra Precision receivers all maintain their tolerance accuracy over the full operating range of the receiver which, combined with digital readout and industry leading robustness assists greatly with improving accuracy.

3. Are there industry standards for accuracy?

No. However, at Spectra Precision we work to our own standards that require all products leaving the factory to be set to a tighter specification than our published specification to allow room for possible shift during transportation and during jostling. In most cases our products have a higher accuracy performance than that specified.

4. Where can I use lasers?

Lasers can be used externally with a receiver and internally visibly with or without a receiver (depending on light conditions). Spectra Precision exterior lasers have a visible beam allowing the user to be able to see where the laser is in order to get the receiver to the on-grade position faster.

5. Can I use lasers for vertical applications?


Yes. Several lasers are designed for this application and are self-leveling in the vertical axis. All HV, GL400, GL600 and UL models are designed to be used in the vertical axis. Applications include formwork, foundations, 90° reference, fencing, facades and wall layout. The laser can replace the string line and be used over long distances. Please note the Planelok function (#2) can be used in either the horizontal or vertical position. There are several laser clamps and receiver brackets available to assist with the quick and efficient setup of vertical alignments.



6. What is Grade Matching?

Grade Matching allows a user to match the fall of the ground or between two existing elevations without complex calculations.

- **Manual Grade Matching** – once the height of the laser has been measured, the user takes the receiver and the rod to the elevation that needs to be matched. Then the laser is sloped until the beam reaches the on-grade position on the receiver. Once complete the grade has been matched.
- **Automatic Grade Matching** – same process as manual grade except that the laser and the receiver communicate via radio and the beam is automatically driven to the on-grade position on the receiver. Some models of laser will also then display the actual grade.

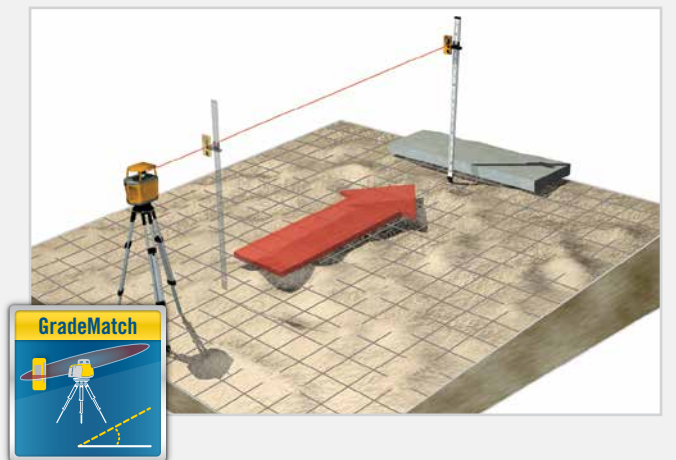

7. What is Automatic Axis Alignment?

When working with grade it is vitally important that the grade axis is aligned correctly. Any slight mis-alignment can cause error, particularly over distance. Automatic Axis Alignment allows the user to align the laser to the grade hub automatically to providing a simple but accurate set-up. The laser communicates to the receiver and aligns to the receiver that is placed on the grade hub (this can be in a range of +/-40 degrees)





Buying Guide

8. What is a Digital Read-Out Receiver?

The Spectra Precision Digital Read-Out receivers have a patented design that delivers consistent accuracy over the entire operating range combined with jobsite durability. The receiver is the one part of the system that receives the most punishment and needs to withstand jobsite abuse such as being dropped or getting wet. With the digital readout models (which have the prefix HL) you do not even need to get the receiver to the on-grade position because it simply displays how far from on-grade you are - allowing you to work faster and more accurately. Readouts can be changed between metric and English units. Be careful to really understand the difference between a Spectra Precision Digital Read-Out receiver and other brands as this could lead to unnecessary errors and additional cost. Not only are these receivers tough and accurate but when used with certain models of laser within the Spectra Precision range they also provide advanced functionality such as automatic grade matching, PlaneLok and axis alignment.



9. How can I distinguish between multiple lasers being used on the same jobsite?

With the new HL760, Spectra Precision introduces a new function called “Fingerprinting” that links the receiver with a particular laser. Once the receiver is paired with the laser transmitter the receiver has the ability to filter out other lasers that strike the receiver and only accept the laser that it is paired with. All lasers marked with the Fingerprint icon have this ability when used with HL760 receiver.



10. Can a laser be knocked over or dropped?

Spectra Precision lasers are designed to be used on the jobsite where they may get knocked over or dropped. If a laser has the “Shockproof” icon it can be dropped 1m onto concrete or withstand a 1.5m pushover on a tripod. What does this mean in real terms? While we can't guarantee that the laser's calibration will not be changed we do guarantee that the most expensive internal components will still work – reducing the lifetime running cost of the laser.



LL100N
Affordable, Easy to Use Laser Level



Key Features and Benefits

- When system case configuration purchased - includes LL100N laser, HR320 receiver, C59 receiver clamp, tripod and choice of grade rod - a complete leveling crew in case
- Easy to transport, easy to store, easy to use
- Fully automatic self-leveling rotating laser provides fast and accurate setup
- Robust design withstands a 3 ft (1 m) tripod tip over and still remains functional, reducing costs for downtime or repair
- 3 Year No-Downtime warranty keeps productivity high and operating costs low
- One-person elevation control up to a 1,150 ft (350 m) diameter
- Optional RC601 remote control allows easy grade matching using the remote control from rod position

Applications

- Checking/setting elevations, concrete forms, footings, and foundations for smaller job sites
- Ideal for patio decks, terraces, swimming pools, septic systems, and leach fields
- Estimating cut and fill



Part No.	Receiver	Rod	Tripod	Case
LL100N	HR320	No	No	Small Case
LL100N-1	HR320	GR151 Tenths	Q104025	System Case
LL100N-2	HR320	GR152 Inches	Q104025	System Case
LL100N-3	HR320	GR153 Metric	Q104025	System Case

All part numbers include LL100N transmitter, HR320 receiver, C59 Adapter for receiver, case, retail carton graphics, 2 D and 2 AA Alkaline batteries





LL300N
Medium-Range,
Highly Accurate Leveling Solution



Key Features and Benefits

- Available with a choice of system case (with receiver, tripod and choice of grade rod) or small carry case with receiver and clamp.
- Fully automatic self-leveling provides fast and accurate setup
- Rechargeable battery pack or alkaline batteries keeps the unit working with no downtime due to power loss
- Optional RC601 remote control allows easy grade matching using the remote control from rod position
- 1650 ft (500 m) operating diameter
- Single-axis manual slope mode with ‘cross-axis’ self-leveling allowing grade matching for basic slope work, while maintaining accuracy in the cross-axis
- Built to withstand severe drops of up to 3 ft (1 m) directly onto concrete, or up to 5 ft (1.5 m) when pushed over on a tripod means less downtime and cost due to damage caused by an accidental drop or tip-over
- Comes with a choice of HL450 or HR320 receivers allowing you to choose the best option to suit your application

Applications

- Checking/setting elevations, concrete forms, footings, and foundations for small and medium sized jobs
- Basic slope work such as driveways and ramps
- Excavating, digging footings, and septic tanks

Part No.	Receiver	Power	Rod	Tripod	Case
LL300N	HL450	4 D Alkaline	No	No	Small Case
LL300N-1	HL450	4-D Alkaline	GR151 Tenths	Q104025	System Case
LL300N-2	HL450	4-D Alkaline	GR152 Inches	Q104025	System Case
LL300N-3	HL450	4-D Alkaline	GR153 Metric	Q104025	System Case
LL300N-4	HL450	Rechargeable pack*	No	No	Small Case
LL300N-8	HR320	4 D Alkaline	No	No	Small Case

All part numbers include LL300N transmitter and case. *Rechargeable pack comes with NiMH batteries and charger.



LL300S
Medium-Range, Highly Accurate
Leveling Solution



Key Features and Benefits

- Available in system case with receiver, tripod and choice of grade rod
- Fully automatic self-leveling provides fast and accurate setup
- Rechargeable battery pack or alkaline batteries keeps the unit working with no downtime due to power loss
- Optional RC402N remote control allows easy grade matching using the remote control from rod position
- 2,600 ft (800 m) operating diameter
- Single-axis manual slope mode with ‘cross-axis’ self-leveling allowing grade matching for basic slope work, while maintaining accuracy in the cross-axis
- Built to withstand severe drops of up to 3 ft (1 m) directly onto concrete, or up to 5 ft (1.5 m) when pushed over on a tripod means less downtime and cost due to damage caused by an accidental drop or tip-over
- Comes with a choice of HL450 or HL760. Fingerprinting function can be used when used in conjunction with HL760 receiver.

Applications

- Checking/setting elevations, concrete forms, footings, and foundations for small and medium sized jobs
- Basic slope work such as driveways and ramps
- Excavating, digging footings, and septic tanks

Part No.	Receiver	Remote	Power	Rod	Tripod	Case
LL300S	HL450	No	4 D Alkaline	No	No	Small Case
LL300S-4	HL450	No	Rechargeable Pack*	No	No	Small Case
LL300S-7	HL760	No	4 D Alkaline	No	No	Small Case
LL300S-17	HL760	No	4 D Alkaline	GR151 Tenths	Q104025	System Case
LL300S-27	HL760	No	4 D Alkaline	GR152 Inches	Q104025	System Case
LL300S-47	HL760	RC402N	Rechargeable Pack*	No	No	Small Case

All part numbers include LL300S transmitter and case. *Rechargeable pack comes with NiMH batteries and charger.





LL500
Longest Range, Highly Accurate
Leveling Solution



Key Features and Benefits

- 1,650 ft (500 m) working diameter which increases productivity by reducing need for multiple set-ups on a large job site
- Self-leveling with built-in ‘out-of-level’ shut off that maintains accuracy over the entire work area, and minimizes errors
- High accuracy laser, 1/16 in per 100 ft (1.5 mm per 30 m) with temperature compensation provides highly stable, repeatable accuracy even under large temperature changes
- Uses alkaline or rechargeable batteries—so you are less likely to run out of power and the unit keeps working with no downtime due to power loss
- Visible ‘spotting’ beam for determining receiver mounting placement making it faster to find the on-grade position
- Comes with a choice of HL700 or CR600 receivers allowing you to choose the best option to suit your application

General Construction Applications

- Checking/setting elevations, concrete forms, footings, and foundations for medium to large commercial jobs

Machine Control Applications

- Excavating, digging footings, and septic tanks with CR600 receiver
- Sub-base leveling with skid steer loaders and CR600 receiver
- Longer range machine control applications

Part No.	Receiver	Power	Rod	Tripod	Retail Package
LL500	HL700	4 D Alkaline	No	No	No
LL500-1	HL700	4 D Alkaline	GR151 Tenths	2161	Yes
LL500-2	HL700	4 D Alkaline	GR152 Inches	2161	Yes
LL500-3	HL700	4 D Alkaline	GR153 Metric	2161	Yes
LL500-4	HL700	NiMH	No	No	No
LL500-10	CR600	4 D Alkaline	No	No	No
LL500-14	CR600	NiMH	No	No	No

All part numbers include LL500 transmitter and case. *NiMH pack comes with charger.



HV101
Economical Solution for Leveling,
Aligning, and Plumb Applications



Key Features and Benefits

- Fully automatic self-leveling in both horizontal and vertical provides fast, accurate setup
- Robust design withstands a 3 ft (1m) drop on concrete and still remains functional, reducing costs for downtime or repair
- Multiple scanning angles and rotation speeds to match various conditions
- Complete GC packages include everything you need for both interior and exterior work in a convenient system case
- Rotor cage can be removed for exact beam spotting
- Simple controls allow operators to carry out many functions with “one-touch” commands
- Included Remote Control offers scanning, rotation speed, slope settings, and alignment control for fast one man setups
- 3 year “over-the-counter” exchange warranty program eliminates downtime

Applications

- Leveling of ceiling grids
- Installation of interior fittings (cabinets, lighting etc.)
- Transferring points from the floor to the ceiling
- Short range leveling for decks and patios

Part No.	Receiver	Grade Rod	Tripod	Wall Mount	Remote	Case
HV101	No	No	No	M101	RC601	Small Case
HV101-4	HR150U	No	No	M101	RC601	Small Case
HV101GC-1	HR320	GR151 Tenths	Q104025	M101	RC601	System Case
HV101GC-2	HR320	GR152 Inches	Q104025	M101	RC601	System Case
HV101GC-3	HR320	GR153 Metric	Q104025	M101	RC601	System Case

All part numbers include HV101 transmitter, wall mount, ceiling target, laser glasses, remote control, case and 2 D Alkaline batteries.





HV302

General Purpose Construction Laser for Medium-range Interior and Exterior Applications



Key Features and Benefits

- The housing is rugged, lightweight and IP66 weatherproof making it easy for contractor carry and use in demanding jobsite conditions, reducing repair downtime
- Fully automatic self-leveling in both horizontal and vertical for fast, accurate setup in horizontal and vertical applications
- Single-axis manual slope mode with 'cross-axis' self-leveling allows grade matching for basic slope work, while maintaining accuracy in the cross-axis
- Automatic Grade Match and PlaneLok using RC402N and HL760
- Highly visible 3A/3R beam and superior scanning functions making it easier for interior layout and aligning over longer range job sites (visible diameter of 330 ft (100 m))
- Long-range remote control operation allows convenient access to key functions across the job site
- Flexible power options, including rechargeable battery pack, AC power and alkaline batteries, combined with low battery warnings, reduces downtime by having multiple power options

Applications

- Interior and exterior, light to medium commercial, and residential construction
- Leveling and aligning of forms and footers
- Leveling and aligning of interior walls
- Installation of ceilings and raised floors
- Exterior walls and facades

Part No.	Receiver	Wall Mount	Power	Ceiling Target	Remote	Rod	Tripod	Case
HV302	HL760	No	4 D Alkaline	No	RC402N	No	No	Small Case
HV302-1	No	M302	Rechargeable Pack*	1176	RC402N	No	No	Small Case
HV302-2	HR150U	M302	Rechargeable Pack*	1176	RC402N	No	No	Small Case
HV302-4	HL760	No	Rechargeable Pack*	No	RC402N	No	No	Small Case
HV302GC-2	HL760	No	4 D Alkaline	No	RC402N	GR152 Tenths	Q104025	System Case
HV302-7	HL760	M302	Rechargeable Pack*	1176	RC402N	No	No	Small Case

All part numbers include HV302 transmitter, case and NiMH battery pack with charger.



HV302G

Multipurpose Green Beam Construction Laser for Interior



Key Features and Benefits

- High visibility green beam is four times more visible than standard red beam lasers allowing work at longer distances and in brighter conditions
- Fully automatic self-leveling in both horizontal and vertical for fast, accurate setup in horizontal and vertical applications
- Increases productivity with fast setups, fewer mechanical parts, and automatic self-leveling
- Line scan and beam plunge feature for easy drywalls
- Rotor vial for easy and accurate vertical plumb set-up
- Preset adjustable rotation speed and scan line sizes to fulfill all interior application needs
- Minimizes power costs, increases reliability with choice of rechargeable or alkaline batteries
- Automatic Grade Match and PlaneLok using RC402N and HL760U

Applications

- Interior, light to medium commercial and residential construction
- Squaring/layout
- Leveling and aligning of interior walls
- Installation of ceilings and raised floors
- Interior finishing work
- Vertical alignment
- Plumb

Part No.	Receiver	Wall Mount	Ceiling Target	Remote
HV302G-1	No	M302	Yes	RC402N
HV302G-2	HR150U	M302	Yes	RC402N

All part numbers include HV302G laser glasses, transmitter, case and NiMH battery pack with charger.





GL412N / GL422N

Single and Dual Grade Lasers with Vertical Alignment



RC402N Remote Control

Key Features and Benefits

- GL412N / GL422N are grade plus horizontal and vertical lasers. Simple, accurate dial in grade from -10% to +15% (Single GL412N, Dual GL422N)
- Up to 2,600 ft (800 m) working diameter which increases productivity by reducing need for multiple set-ups on a large job site
- Fast setup, minimal training time and automatic self leveling minimize operating costs and boost productivity
- Highly rugged design and patented lighthouse seal protects the rotor head and glass and offers superior drop and weather protection for reduced downtime
- 2-way full function remote control allows grade changes to be made from anywhere on the jobsite
- Temperature calibrated for high accuracy over wide temperature changes
- IP66 dust and water-proof to withstand harsh jobsite conditions
- Customizable with choice of HL760 or CR600 receivers
- Mask mode eliminates interference from other crews on the jobsite
- Automatic Grade Match and PlaneLok

Applications

- Leveling concrete forms and footers
- General construction vertical alignment and plumb such as anchor bolt and form alignment
- “Over the top” sewer and storm drain pipe installations
- Grading and excavating
- Driveways and ramps
- Trenching
- Sport fields, tennis courts (GL422N only)
- Steep slope road embankments and ditch banks

Part No.	Receiver	Clamp	Remote
GL412N / GL422N	HL760	C70 Adapter for receiver	RC402N
GL412N-14 / GL422N-14	CR600	C50 Rod Clamp and C51 Magnetic Mount	RC402N

All part numbers include GL412N/GL422N transmitter, case and NiMH rechargeable battery pack and charger.



GL612N / GL622N

Versatile Automatic Single and Dual Grade Laser for Level, Grade, and Vertical Alignment



RC602N Remote Control

Key Features and Benefits

- GL612N / GL622N are grade lasers with a compensated grade range of -25% to +25%. Vertical and horizontal setups are also compensated
- Quick setups with the 2-way radio remote control
- Electronic Leveling Vibration Filter dampens vibrations typically experienced on tall tripods, in high winds, or on high vibration jobsites
- Very rugged with low service costs; takes a 3 ft (1 m) drop on concrete
- Mask mode eliminates interference with other crews on the jobsite
- Automatic Axis Alignment (GL622N only) is easy to setup for increased accuracy.
- Radio communication between the laser and HL760 Laserometer allow advanced features and remote display capabilities
- Long operating radio range - 490 ft (150 m)
- Grade Match displays the existing grade over unknown ground and eliminates time consuming and error prone calculations, time spent searching for grade plans, and over excavating
- PlaneLok automatically locks on to an existing elevation or vertical alignment point which eliminates all drift or possibility of error due to improper calibration or weather
- 5 Year “No Cost” Warranty

General Construction Applications

- Leveling concrete forms and footers
- General construction vertical alignment and plumb such as anchor bolt and form alignment
- “Over the top” sewer and storm drain pipe installations
- Driveways and ramps
- Grading and excavating

HL760 Applications

- Trenching
- Remote grade checking with cable free remote display
- Wireless monitoring of foundations and steel erections
- Risk free monitoring of tilt up wall position

Part No.	Receiver	Clamp	Remote
GL612N / GL622N	HL760	C70 Adapter for receiver	RC602N

All part numbers include transmitter, case and NiMH rechargeable battery pack and charger.



GL710, GL720, GL722

High Precision, Extra Long Range Grade Lasers



RC703
Remote Control

Key Features and Benefits

- Temperature compensation provides accurate stable results regardless of temperature changes
- Long battery life and flexible power options keep the unit working throughout the day
- Large displays make the numbers easy to read, even when set-up on a tall tripod
- Better than 5 arc second servo deadband accuracy for demanding high accuracy requirements

GL710 Single Grade Laser

- Up to a to 3,000 foot (900 meter) diameter. With -0.5 to 25% grade range, the GL710 is a great choice for general construction, site preparation, trenching and pipe-laying applications

GL720 Dual Grade Laser

- The GL720 features +/- 10% in the X axis grade range and -0.5 to +25% Y-axis grade range with high accuracy up to 3,000 foot (900 meter) diameter. The GL720 is ideal for general construction and machine control grade applications

GL722 Dual Grade Laser

- With a Long-range Radio Remote and the same range and base capabilities as the GL720, the GL722 includes all the benefits of the full Radio Remote functions... plus Automatic Axis Alignment, Grade Match and PlaneLok capability. Ideal for general construction, site preparation and road construction.

Applications

- General construction
 - Site preparation
 - Trenching
- Road construction
 - Machine control

Part No.	Grade	Receiver	Clamp
CTO-GL710	Single	HL700	C70 Adapter for Receiver
CTO-GL710-10	Single	CR600	C50 Adapter for receiver and C51 Mag. Mount
CTO-GL720	Dual	HL700	C70 Adapter for Receiver
CTO-GL720-10	Dual	CR600	C50 Adapter for receiver and C51 Mag. Mount
CTO-GL722	Dual	CR600	C50 Adapter for Receiver and C51 Mag. Mount
CTO-GL722-IR	Dual Infrared	CR600	C50 Adapter for receiver and C51 Mag. Mount

All part numbers include transmitter, case and NiMH rechargeable battery pack and charger.



Universal Laser UL633N

The Most Versatile Construction Laser, Ever



RC603N Remote Control

Key Features and Benefits

- Full control for horizontal level, single or dual grade, vertical alignments or setting out 90° angles- providing the ability to do so much more from one single laser
 - Long operating radio range - 490 ft (150 m)
 - High precision alignment for grades – align automatically to your grade hub for accurate grade set-ups on X, Y or XY axis simultaneously. Only grade laser on the market that provides the ability to have a second grade axis that can be set from 10° to 170°. For car park set ups or other applications where two grade axes are not at 90°. No need to spend time calculating the set-up just align to the receivers and start working
 - **Grade matching** – measures and displays the grade between 2 elevations over unknown ground also simultaneously on two axes
- Precise control for high accuracy applications such as concrete floors – the laser will lock onto the receiver and stay fixed in the on-grade position all day eliminating costly drift caused by temperature fluctuations – **PlaneLok**
 - Fast vertical alignment – laser will align either to the receiver or SpotFinder for vertical alignments such as façade installation, building axis alignment or kerbs.
 - **Rapid 90° degree layout** – set a 90° angle in seconds with no complex calculations
 - Various power options – keeping you working when you need to work
 - Intuitive menu driven operation – no secret button pressing, select your mode and start working
 - Versatility to fit any construction application providing more value and higher return on your investment – do more with one product

Applications

- Levelling concrete forms and footers
 - Vertical alignment for anchor bolts, building axis, facades and form alignment
 - Dual slope grading and steep slope excavation
- Slope work for sports fields, driveways, parking garages and ramps
 - Layout of concrete pads and for any job requiring 90° layout outdoors

Part No.	Receiver	Spot Finder SF601	Clamp	Remote
UL633N	2x HL760	with adapter with rubber strap	Rod Clamps with Bubble Vial	RC603N

All part numbers include transmitter, case and NiMH rechargeable battery pack and charger.





DG613 DialGrade

Small and Powerful



Key Features and Benefits

- New reduced length to make it easier to fit in pipes around tighter invert
- Self levelling range of -12% to +40% over the entire grade range
- Cross axis compensation provides a quicker more accurate set-up as the laser does not have to be level in the pipe – place it in the pipe it levels, you work.
- Bright visible beam that works up to 500ft (150m)
- RC803 remote works via radio 430ft (130m) or infra-red 500ft (150m) for both “over-the-top” set-up and in pipe/trench set-up.
- Large, bright, graphical user interface makes the screen easier to see and use when in or out of the pipe. Same graphical user interface can be seen on the remote – what you see on the laser you see on the remote.
- The Spectra Precision DG613 has advanced functionality that makes setting up and using it easier and more accurate:
 - Line-Set/Check – allows the user to align the laser to the manhole quickly and easily to set direction. The beam will go up to 100% allowing easy alignment even in short trenches
 - Line Scan – provides a quick alignment to the centre of the target
 - Line Alert- notifies the user if the set-up is disturbed eliminating costly re-work from errors

Applications

- Installation of gravity flow sanitary pipelines
- Storm sewer pipelines
- Pipe jacking
- Tunnel boring
- Can be used in a pipe or in over the top set-ups

Part No.	Components	Power
DG613	DG613 Laser, 1248 trivet plate 8 inch (200mm), RC803 IR/Radio Remote Control, 956 target	NiMH Recharge
DG613-5	DG613 Laser, 1230 large invert plate, 1239 vertical pole, RC803 IR/Radio Remote Control, 956 target	NiMH Recharge
DG613-6	DG613 Laser, 1237 large invert plate (metric), 1239 vertical pole, RC803 IR/Radio Remote Control, 956 target	NiMH Recharge
DG613-13	DG613 Laser – Over-the Top Package, 1263 precise scope, RC803 IR/Radio Remote Control, P25 power outlet charger, 2 x NiMH battery pack and 1 x charger	NiMH Recharge



DG813 DialGrade

Small, Tough and Smart – Perfection in a Pipe



Key Features and Benefits

- New reduced length to make it easier to fit in pipes around tighter invert
- Self levelling range of -12% to +40% over the entire grade range
- Cross axis compensation provides a quicker more accurate set-up as the laser does not have to be level in the pipe – place it in the pipe it levels, you work.
- Bright visible beam that works up to 500ft (150m)
- RC803 remote works via radio 430ft (130m) or infra-red 500ft (150m) for both “over-the-top” set-up and in pipe/trench set-up.
- Large, bright, graphical user interface makes the screen easier to see and use when in or out of the pipe. Same graphical user interface can be seen on the remote – what you see on the laser you see on the remote.
- The DG813 has flexible power options that provide 40 hours operating time (NiMH rechargeable batteries with Worldwide charger) and 50 hours (alkaline batteries). Alkaline batteries can be used directly in the laser without a separate battery pack. Additional car charger can be purchased to keep you working even when out in remote areas.
- The Spectra Precision DG813 has advanced functionality that makes setting up and using it easier and more accurate:
 - Line-Set/Check – allows the user to align the laser to the manhole quickly and easily to set direction. The beam will go up to 100% allowing easy alignment even in short trenches
 - Line Scan – provides a quick alignment to the centre of the target
 - Line Alert- notifies the user if the set-up is disturbed eliminating costly re-work from errors
- The SF803 SpotFinder, when used with DG813, provides other automatic functions making it the smartest pipe laser in the industry :
 - Spot Align – automatically aligns the DG813 to the centre of the SpotFinder in the pipe or to the direction of the manhole when used in a trench or “over-the-top” set up.
 - Spot Match – a great tool for checking that pipe has been installed to the correct grade or for finding the grade of existing pipe work. Can also be used to calculate the grade between manholes.
 - SpotLock – can be used to lock the beam in a desired position for applications such as solar farms where the beam could be subject to drift.
 - Spot Search – can be used to locate the beam over long distances out of the trench

Applications

- Installation of gravity flow sanitary pipelines
- Storm sewer pipelines
- Pipe jacking
- Tunnel boring

Part No.	Accessory	Power
DG813	DG813 Laser, 1248 trivet plate 8 inch (200mm), RC803 IR/Radio Remote Control, SF803 Spot Finder w/pole adapter & target plate, 956 target, Transporter ST802	NiMH Recharge
DG813-3	DG813 Laser, 1230 large invert plate, RC803 IR/Radio Remote Control, SF803 Spot Finder w/pole adapter & target plate, 956 target, Transporter ST802	NiMH Recharge
DG813-5	DG813 Laser, 1230 large invert plate, 1239 vertical pole, RC803 IR/Radio Remote Control, SF803 Spot Finder w/pole adapter & target plate, 956 target, Transporter ST802	NiMH Recharge
DG813-6	DG813 Laser, 1237 large invert plate (metric), 1239 vertical pole, RC803 IR/Radio Remote Control, SF803 Spot Finder w/pole adapter & target plate, 956 target, Transporter ST802	NiMH Recharge





HR150U Receiver

Interior Receiver with Highly Visible LEDs and Built-in Magnetic Mount



Applications

- Interior and exterior leveling and aligning
- Soffit, curtain wall or glazing applications
- Ceiling grid and raised floor installations

Key Features and Benefits

- Features a 3-channel dual-sided LED with a green on-grade display that can be easily seen indoors or outdoors over long distances
- Built-in magnet and level bubble allows the receiver to mount to ceiling grid or drywall track without the need for additional accessories
- Marking notches on both sides to easily mark alignments and elevations
- Can be used with any brand rotating red, green or IR laser
- Strong composite housing and optional lanyard offers protection against damage due to dropping
- For interior or exterior short-range general construction applications, with a general purpose rod clamp standard
- The perfect entry level receiver for smaller job sites
- Includes C61 rod clamp



HR320 Receiver

Tough Receiver for Exterior Leveling and Alignment Applications



Applications

- Measuring cut and fill for small site preparation
- Exterior leveling, aligning and marking
- Checking elevations

Key Features and Benefits

- Dual LCD's on front and rear are ideal for general exterior applications
- Two on-grade sensitivities (fine and coarse) allow getting to grade fast
- Snap-on rod clamp (included) allows quick switching from rod-mounted to handheld applications
- Strong, IP67 waterproof housing protects the unit from dust, moisture, and accidental drops
- Loud 100 db loud speaker can easily be heard on the noisiest job sites. 3 adjustable speaker levels (loud, low, and off)
- Includes C59 rod clamp



HR220 Line Laser Receiver

Special Receiver for use with Line Lasers




Applications

- Extends versatility of laser line generators
- Longer distance interior layout and exterior leveling
- Ceiling grid and raised access floor installations

Key Features and Benefits

- Five channel LCD on the front for general exterior leveling
- Simultaneous LED display shows green on grade, red too high and blue too low
- Built in magnet allows the receiver to be easily mounted to ceiling grid or drywall track without the need for additional accessories
- Works with line lasers
- Snap in rod clamp allows for quick switching from rod mounted to handheld
- Integrated level bubbles for adjusting the receiver into a plumbed position
- Durable in wet and dusty conditions; the housing and battery compartment are waterproof and dust-proof to IP67

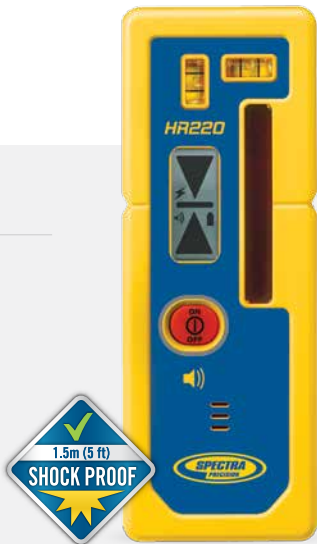

HL450 Digital Readout Receiver

Ideal for use with any Rotating Transmitter



Applications

- Checking elevations
- Basement excavation
- Digging septic tanks
- Checking foundations
- Digging footings
- Setting forms
- Checking sub-base materials
- Screeding concrete

Key Features and Benefits

- Digital readout of elevation allows faster readings by displaying the exact numerical distance from grade, eliminating the need to move the receiver to get to "on-grade"
- Anti-Strobe Sensor stops construction strobe lights from setting off the receiver, and eliminates phantom strikes for easier identification of true laser beam signals
- Large 4-inch (10.2-cm) reception height allows faster readings by acquiring the beam quickly, and makes it easier to stay in the beam
- Withstands direct drops up to 5 feet (1.5 meters) on to concrete providing less downtime due to damage and service requirements
- Full weather and dust proof design, including the battery compartment assures a longer product life and/or repair costs
- Approximately 60-hour battery life with 2 x AA batteries keeps work going on the jobsite
- Automatic power shutoff (after 30 minutes) reduces annual battery cost
- Rod clamp included



HL700 Digital Readout Receiver

Highly Versatile Receiver for Basic and Advanced Leveling and Aligning



Applications

- Checking elevations
- Basement excavation
- Digging septic tanks
- Checking foundations
- Digging footings
- Setting forms
- Checking sub-base materials
- Screeding concrete

Key Features and Benefits

- Digital Readout of Elevation provides a numeric display of ± 2 inches (± 5 cm) and shows exactly how far the elevation is from on-grade
- A large 5 inch (12.7 cm) reception height, more than double the industry standard, allows quick acquisition of the laser beam
- Unique anti-strobe sensor stops construction strobe lights from setting off the receiver, and eliminates phantom strikes for easier identification of true laser beam signals
- Multiple on-grade sensitivities to customize accuracy needs to application
- Designed to survive the tough construction site conditions; it is totally waterproof and can withstand a drop of 10 feet (3 meters) onto concrete
- Simultaneous elevation LEDs signal in low light levels and over a longer range provide easier reading in poor light
- Two clamp positions for cut/fill or excavation. Excavation mode puts more reception height and elevation information above grade for higher utilization in digging and staking applications
- Three-year "No Excuses" warranty
- C70 Adapter with Bubble Vial included



HL750 Radio Digital Readout Receiver

Digital readout and robust performance



Applications

- Checking elevations
- Basement excavation
- Septic tank installation
- Checking footings and foundations
- Checking sub-base materials
- Screeding concrete
- Vertical alignment (with laser in vertical mode)

Key Features and Benefits

- The HL750 with radio communication is a stand alone receiver that works with all red beam laser transmitters providing a digital readout for elevation control in millimetres or fractional inches, eliminating the need to get "on-grade" when taking measurements.
- The internal radio allows the receiver to be paired with a second HL750 for long range wireless remote display or monitoring – even when the second receiver is out of sight. This can be particularly important when using a laser for vertical alignment as the paired receiver can be given to a crane operator to see what is being seen at ground level when putting steel or building facades into position. It also works with the GL612, GL622 and UL633 to provide advanced functions such as grade matching, axis alignment and PlaneLok.
- When working in deep excavations the capture mode allows the user to pick up the laser elevation without having to adjust the receiver to the on-grade position – it tells you how far off on-grade you are.
- Anti-strobe sensor stops construction strobe lights from setting off the receiver, reducing costly errors.
- Will take a drop of upto 10ft (3m) onto concrete for reduced downtime.
- Clamp comes with patented reversible jaw to allow a more solid fix to round or square rods.



HL760 / HL760U Radio Digital Readout Receiver

Highly Versatile Receiver for Basic and Advanced Leveling and Aligning



Applications

- Remote grade checking with cable free Remote Display
- Wireless monitoring of foundations and steel erections
- Risk free monitoring of tilt up wall position

Setting and checking jobsite elevation and depth for:

- Cut and fills and grading
- Foundations, forms, and footings
- Excavations

Key Features and Benefits

- Digital readout of elevation – not only will high or low arrows be displayed, but the exact distance from grade will be displayed, which eliminates the need to get "on-grade" to make measurements
- Large 5 inch (12.7 cm) reception height acquires the beam quickly and makes it easy to stay in the beam
- The HL760 / HL760U has an internal, long range 330 ft (100m) radius, high speed digital radio built inside that allows the receiver to communicate with any other HL760 / HL760U: LL300S, LL400HV, HV302, GL412N / GL422N laser transmitters
- Machine operators can monitor elevation shots taken by another person or foremen can monitor elevations and cut/fill readings from anywhere on the jobsite
- Anti-strobe sensor stops construction strobe lights from setting off the receiver, and makes it easier to identify true laser beam signals
- Multiple deadband setting allows adaptation to meet all your jobsite requirements
- Dust and weatherproof housing withstands a drop of up to 10 ft (3 m) onto concrete for reduced downtime
- Two clamp positions for cut/fill or excavation
- Three-year "No Excuses" warranty
- C70 Adapter with Bubble Vial included
- HL760U can also accept infrared and green beam lasers
- When working in deep excavations the capture mode allows the user to pick up the laser elevation without having to adjust the receiver to the on-grade position – it tells you how far off on-grade you are.
- Clamp comes with patented reversible jaw to allow a more solid fix to round or square rods.





CR600 Combination Receiver

Machine or Rod Mounted Combination Receiver



Key Features and Benefits

- Provides high, low, or on-grade information for all your grading and excavation applications up to 1,500 ft (460 m) radius
- In addition to handheld and rod-mounted capabilities, the CR600 system includes a C51 machine magnetic mount so it can be used as a machine-control mounted receiver in a wide range of jobsite applications
- Magnesium housing is rugged but lightweight
- Super-bright LED display can be easily seen by a machine operator in brightly lit conditions
- 270° reception for easy visibility of on-grade beam
- Five on-grade sensitivities to customize need to application
- Two-year warranty
- Can be used with any brand rotating red laser
- On grade off mode for monitoring
- Line alert mode for long range vertical alignment

Applications

- Digging footings
- Basement excavation
- Checking sub-base materials
- Setting and checking elevations
- Leveling and aligning forms
- Screeding concrete



Accessories and Components for Laser Receivers: All receivers include rod clamps (CR600 includes rod clamp and magnetic mount)

Optional Bubble Vial Kit for HR150U, HR220, HR320 and HL450 receivers adapters PN 1277-6251S


HL700, HL750/U and HL760/U includes C70 Adapter for receiver with Bubble Vial PN C70

C51 Magnetic Mount included with CR600 receiver

C50 Adapter included with CR600 receiver

Electronic Fieldbook App

Simplifies Level Recording

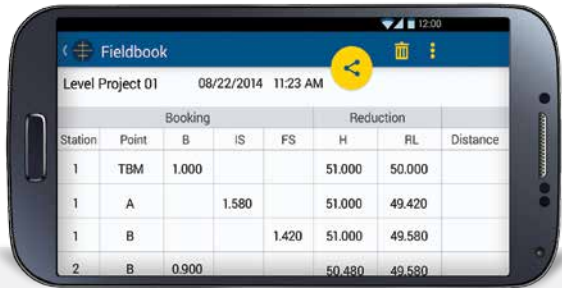

Key Features


- Choose your workflow – Height of Collimation, Rise & Fall or Cut & Fill
- Guides you through the workflow, making it simple and easy to use
- Input your levels and the calculations are done for you – eliminating errors with calculations
- Closure checks performed automatically – no math required
- Multiple methods for export (Google Drive, Email, Dropbox, Bluetooth)
- Send messages to the rod man direct from the app to improve communication and eliminate hand signals
- Available in iOS or Android
- No need to purchase level books – permanent record for all your projects

User Benefits

- Input your readings and all the math is taken care of – eliminating errors
- Improve communication with rod-man
- Permanent record of every job, including GPS position of the jobsite that can be sent or shared via multiple methods
- Simple and easy to use

Applications

- All level work – Height of Collimation, Rise & Fall and Cut & Fill
- Use with laser (Cut & fill) or auto-level for all applications

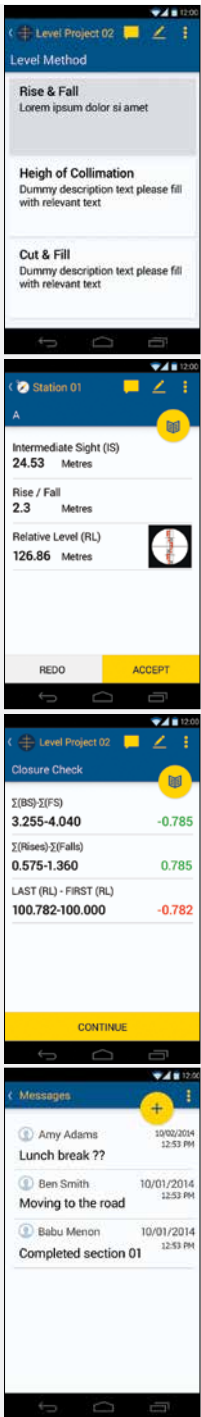



Automatic Level

Easy-to-use Optical
Auto-levels



Air dampened model shown

Key Features and Benefits

- Choice of magnetic or air dampened automatic compensators
- Double-sided, continuous horizontal tangent drives
- Stadia lines for simple distance measurement
- Convenient horizontal angle measurement
- Built in bubble mirror and sighting guide
- Metal housing for increased durability
- Water resistant construction
- Includes hardshell case
- Two-person leveling across the job site
- Leveling forms and footers
- Checking elevation
- Measuring cut and fill

AL20M

Part No.	Power/Damp	Tripod	Rod
AL20M	20X / Magnetic	No	No
AL20M-1	20X / Magnetic	5301-27-BLK-SP	GR151
AL20M-2	20X / Magnetic	5301-27-BLK-SP	GR152
AL20M-3	20X / Magnetic	5301-27-BLK-SP	GR153

AL24A, AL24M

Part No.	Power/Damp	Tripod	Rod
AL24A	24X / Air	No	No
AL24M	24X / Magnetic	No	No
AL24A-1	24X / Air	5301-27-BLK-SP	GR151
AL24M-1	24X / Magnetic	5301-27-BLK-SP	GR151
AL24A-2	24X / Air	5301-27-BLK-SP	GR152
AL24M-2	24X / Magnetic	5301-27-BLK-SP	GR152
AL24A-3	24X / Air	5301-27-BLK-SP	GR153
AL24M-3	24X / Magnetic	5301-27-BLK-SP	GR153

AL28M

Part No.	Power/Damp	Tripod	Rod
AL28M	28X / Magnetic	No	No
AL28M-1	28X / Magnetic	5301-27-BLK-SP	GR151
AL28M-2	28X / Magnetic	5301-27-BLK-SP	GR152
AL28M-3	28X / Magnetic	5301-27-BLK-SP	GR153

AL32A

Part No.	Power/Damp	Tripod	Rod
AL32A	32X / Air	No	No

DET-2 Construction Theodolite

Full Featured Digital Theodolite
for Construction



Key Features and Benefits

- 2 arc seconds angular accuracy - accurate enough for any construction job, yet the display resolution can be tailored to any operator's preferences for fast readings
- Vertical axis compensation - tilt sensor provides the highest level of accuracy and can be turned on or off depending on job requirements
- Dual LCD with large characters - easy to see angle readings eliminate errors and reduces eye fatigue
- Simple six button keypad - quick setups and simple operation with low operator learning curve
- Large suite of programmable settings - provide multiple options for various users and job requirements including zero position of vertical angle
- Measurement units in degrees, gon, or mils
- 90 Degree angle audible notification - for quick turning and set out of right angles
- Instant conversion of vertical angles to percent of grade - convenient for slope work and when used in conjunction with Dialgrade® pipe work
- NiMH rechargeable battery pack and charger - lower operating cost with reusable batteries
- Alkaline battery pack standard - provides backup and eliminates downtime if the charge is lost in the middle of a job
- Each DET-2 comes equipped with a plumb bob, NiMH rechargeable battery pack and charger, alkaline battery pack, adjustment tools, rain hood, multi-language user guide, and hardshell, compact, o-ring sealed, carrying case

Applications

- Establishing 90 degree reference lines
- Checking angles, alignment, and plumb
- Anchor bolt alignment
- Gravity flow pipe laser setup
- Steel column placement
- Alignment of forms, tilt-up walls, and curtain walls
- Basic grade work
- Short range leveling



LP30 / LP50 Laser Pointers

3-Beam and 5-Beam Self-leveling Pocket Lasers



Key Features and Benefits

- The LP30 projects 3 beams - one beam up, one down and one horizontal beam
- The LP50 projects 5 beams - one beam up, one down and three beams at 90 degrees to each other
- Self-leveling, and universal accessories allow for setup in multiple applications
- Patented technology... highly visual in all conditions for better productivity
- Beam flashes if it becomes out of level for any reason
- Easily fits in your tool belt so it's always at hand
- 3 year instant exchange warranty minimizes downtime
- Able to withstand a 3-foot (1 meter) drop... IP54 rated
- LP30 ships in retail box with soft pouch, target and mounting accessory
- LP50 ships in retail carton with hard case, target, ceiling plate and mounting accessory

Applications

- Level, horizontal and vertical layout, checking plumb
- Point transfer
- Checking square with LP50
- Layout of interior walls, drywall track installation
- Drywall track installation
- Cabinet & trim installation, finish carpentry
- Reference points for sprinkler systems, HVAC, lighting

Part No.	Description	Dots
LP30	3 beam point laser with target, magnetic bracket in a pouch	3
LP50	5 beam point laser with target, magnetic bracket in a hard case	5



LT20 Crossline Laser

Simple to Use — Perfect for Interior Construction



Key Features and Benefits

- Capable of handling interior horizontal, vertical or plumb positioning application
- Extra bright lines
- Automatic self-leveling assures accuracy and fast setup
- 3 year instant exchange warranty minimizes downtime
- Water, mud, and shock resistant, able to withstand a 3-foot (1 meter) drop onto concrete... IP54 rated
- Included clamp for ceiling installation

Applications

- Level, horizontal & vertical layout, square, & plumb
- Building, layout, & squaring of interior walls
- Acoustical ceiling installation (small rooms)
- Drywall track installation
- Cabinet & trim installation, finish carpentry


Part No.	Receiver	Case	Ceiling Bracket
LT20	No	Soft Pouch	Yes





LT52 Point & Line Laser Tool

The Tool for All Trades

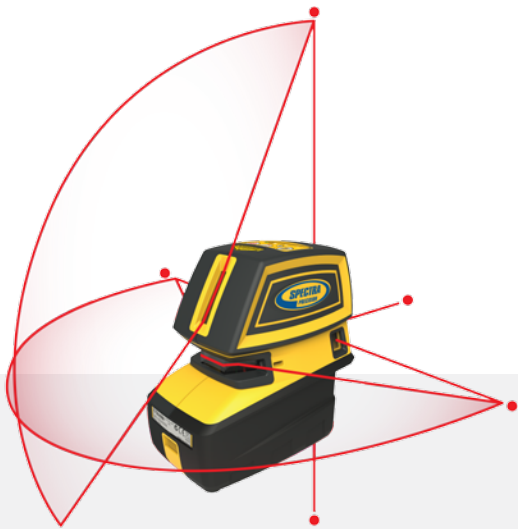

Key Features and Benefits

- Eliminates the need for contractors to purchase two tools by combining a 5-beam pointer and a crossline laser into one product
- Versatile tool does multiple jobs - set it up once and work plumb, level and square in the whole area
- Automatic self-leveling assures accuracy and fast setup
- The industry's brightest crosslines and points for easy viewing in all conditions – points are visible up to 200 feet (60 m)
- Wide 210° horizontal line intersects side points; Vertical up beam intersects up point
- Down point clears floor track, no accessory required
- Long battery life – 56 hours for pointer on alkaline batteries
- 3 year instant exchange warranty minimizes downtime
- Water, mud, and shock resistant, able to withstand a 3-foot (1-meter) drop onto concrete... IP54 rated
- New magnetic bracket can be attached to steel columns, wall studs or any steel surface
- HR220 receiver can be added for exterior applications for maximum jobsite versatility

Applications

- Level, horizontal and vertical layout, square, and plumb
- Building, 90° layout, and squaring of interior walls
- Point transfer
- Acoustical ceiling installation
- Drywall track installation
- Cabinet and trim installation, finish carpentry
- General construction elevation control with HR220 receiver
- Exterior building decks, patios, columns, and posts

Part No.	Receiver	Case	Magnetic Bracket
LT52	No	Hard Case	Yes
LT52-2	HR220	Hard Case	Yes

LT56 Rugged Universal Laser Layout Tool

Simple to use – Perfect for Interior Construction



Key Features and Benefits

- Capable of handling interior horizontal, vertical or plumb positioning application
- Horizontal plane and 2 vertical planes provide a precise 90 degree layout grid with four cross line intersections
- Automatic self-leveling assures accuracy and fast setup
- One tool to use on every job every day. HR220 receiver can be added for exterior applications for maximum jobsite versatility
- 3 year instant exchange warranty minimizes downtime
- Water, mud, and shock resistant, able to withstand a 3-foot (1 meter) drop onto concrete... IP54 rated

Applications

- Level, horizontal & vertical layout, square, & plumb
- Building, layout, & squaring of interior walls
- Acoustical ceiling installation
- Drywall track installation
- Cabinet & trim installation, finish carpentry
- General construction elevation control with HR220 receiver
- Reference points for sprinkler systems, HVAC, lighting
- Exterior building deck footings, patios, columns, & posts

Part No.	Receiver	Case
LT56	No	Hard Case
LT56-2	HR220	Hard Case





LT58 Laser Tool

The Go-To Ceiling Laser



Key Features and Benefits

- High visibility 360° green beam can be seen up to 100 ft (30m) and provides full room coverage with a single set up
- Compact and lightweight design allows easy and secure mounting at ceiling height
- 2 red laser beams that can be used for vertical alignment
- Small compact hard case is easy to store on-site and easy to transport
- Universal mounting accessory fits all main ceiling track styles including shadow track
- Mounting accessory includes vertical fine adjust, fine rotation, magnetic mounting for steel columns and multiple tripod mount sizes
- Simple Operation and set up – automatic self levelling, constant beam, no rotation

Applications

- Ceilings
- Level, horizontal and vertical layout, square & plumb
- Square and plumb of interior walls
- Drywall track layout and installation
- Cabinet and trim installation, finish carpentry
- The intersection of planes can be used for point transfer floor to ceiling, front to back and side to side

Part No.	Receiver	Case
LT58	No	Hard Case



QM Series

Quick Measure Lasers

Digital Distance Measuring



Key Features and Benefits

- One-person operation allows safe measuring to difficult-to-reach or hazardous locations
- Tough and rugged, designed for construction - Drop spec of 5 feet (1.5 m)
- Sealed against dust and water - simply wash it off if it gets dirty
- More accurate than traditional measuring tapes
- Small, compact - fits in your pocket or toolbelt
- Illuminated display - easy to read in low light conditions
- Long battery life - up to 8000 measurements

Applications

- Measuring distance
- Measuring for material estimation
- Safely measurement on places, where hard to reach

QM55

- Area and volume functions**
 - Easy quick calculations of common tasks
- Pythagoras functions**
 - Provides indirect height or width for inaccessible areas

QM95

- High accuracy**
 - ±1.0 mm (±1/24 inch) accuracy for precise work
- Long range measurements**
 - 200 m (650 feet) range

QM75

- Small and compact**
 - Fits in your pocket; easy to carry and transport
- Simple to operate**
 - Press a single button and measure



QML800 / QML800G
X Marks the Spot



Key Features and Benefits

- An Android tablet wirelessly controls 2 lasers - self-contained network
- Intuitive, easy-to-use Android application – operators require no surveying background or training
- The user simply selects any point and the lasers rotate to create, within few seconds, a bright visible X where this point is located
- Desired points located extremely fast – within 5 seconds
- Points are accurate – to within 1/8" (3mm)
- Complicated shapes, arcs and curves are now easy to layout - no calculations required
- Now includes BuildView application software that allows users to load the architectural file and select points directly from the file. No need for advanced point file creation.
- Includes license for BuilView Office which enables users to open architectural files on a computer to view, analyze and plan layout and build.
- Most floors can be laid out in one day or less—complete before materials clutter the floor
- Typical 65% reduced layout time and 50% labor reduction over traditional layout methods
- No distance measure errors, no math errors
- In and out before other trades start storing materials on the floor
- Available with green laser beams


Applications – Interior Layout

- Drywall
- HVAC
- Plumbing
- Electrical
- Warehouse, retail and factory layout

Part No.	Includes:
QML800	Lasers, Android tablet controller, tripods, beam interceptor, LP30 plumb pointer, chargers, laser glasses in a hard case
QML800G	Lasers, Android tablet controller, tripods, beam interceptor, green plumb pointer, chargers, green laser glasses, clutter buster and a hard, rolling case



LR20 Receiver
Compact Receiver for Compact Machines

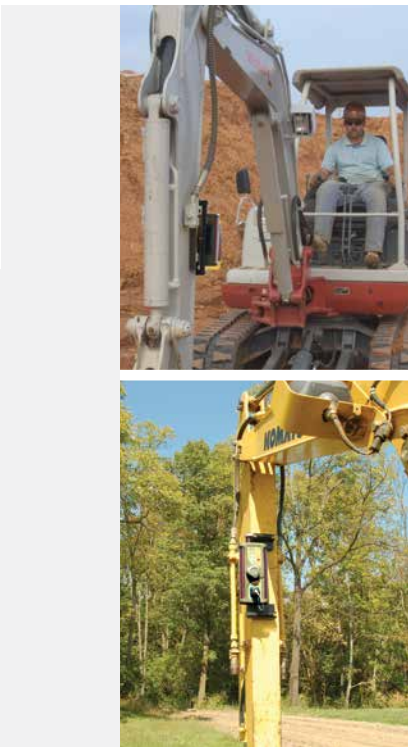

Applications

- Landscaping, building pads, sports fields, concrete flatwork, tennis courts
- Ideal for mini-excavators
- Footers, storm drains, utility, sewage
- General construction grade and depth control

Key Features and Benefits

- Designed to be used on smaller machines – LR20-1 comes with smaller adjustable magnetic mount ideal for mini-excavators
- **360 degree reception** and 8 inch (203 mm) vertical reception provide large working area and range making it easier to get to desired elevation without over-digging
- Rugged housing allows the receiver to be used in the toughest jobsite conditions
- Super bright LED display providing easily visible depth and elevation control to the user
- Easy to use with a simple push button set-up
- Ideal for both grading and excavating
- **Built-in plumb indication** makes grade checking simple and easy and avoids errors

Part No.	Batteries	Magnetic Mount
LR20	NiMH	No
LR20-1	NiMH	MMM



LR30 & LR30W Receiver
Used on Dozers, Box Blades, Levelers



Applications

- Machine mounted grade checking
- Grading and leveling

Key Features and Benefits

- Three selectable accuracy settings allowing the user to rough grade through to final finish
- Full **360 degree reception** – picking up the laser beam wherever you are working reducing downtime and eliminating errors
- Choice of batteries and mounting kit packages
- LR30W provides **wireless link** to RD20 remote display that can be placed in cab in the operators peripheral vision so they concentrate on what is happening at the bucket or blade
- Robust and built for jobsite environment – **2 year warranty**

Part No.	Batteries	Magnetic Mount	Remote Display
LR30	NiMH	No	
LR30-MM	NiMH	MM-1	
LR30-DM	NiMH	DM-20	
LR30-1	Alkaline	No	
LR30W	NiMH	No	RD20
LR30W-MM	NiMH	MM-1	RD20
LR30W-DM	NiMH	DM-20	RD20
LR30W-2	NiMH	No	No





LR50 & LR50W Receiver

Blade Tilt and Plumb Indicator



Applications

- Machine mounted grade checking
- Grading and leveling
- Excavation and trenching

Key Features and Benefits

- Plumb Indication** – for fast, accurate grade checking when excavating
- Blade Tilt Indication** –helps the operator keep the blade level for increased accuracy and productivity. Tilt can be set to an existing angle too providing more flexibility for the operator
- Center on-grade** provides an equal amount of grade information above and below grade when used on grading machines

Part No.	Batteries	Magnetic Mount
LR50	NiMH	No
LR50-MM	NiMH	MM-1
LR50-DM	NiMH	DM-20
LR50-1	Alkaline	No



- Offset on-grade** provides more range above the on-grade position using the entire receiver to avoid over-digging
- LR50W provides **wireless link** to RD20 remote display in cab for easier reference by the operator
- Robust and built for jobsite environment – **2 year warranty**

Part No.	Batteries	Magnetic Mount	Remote Display
LR50W	NiMH	No	RD20
LR50W-MM	NiMH	MM-1	RD20
LR50W-DM	NiMH	DM-20	RD20
LR50W-2	NiMH	No	No



LR60 & LR60W Receiver

Angle Compensation for Excavation



Applications

- Machine mounted grade checking
- Grading and leveling
- Excavation and trenching

Key Features and Benefits

- Patented Angle Compensation** Indication - automatically calculates and corrects the grade display for the angle of the dipper arm when excavating allowing the operator to check grade in multiple locations without moving the machine
- Check grade with the dipper arm extended to or retracted **up to 30 degrees**
- Four selectable accuracies – allowing for rough or precise work

Part No.	Batteries	Magnetic Mount
LR60	NiMH	No
LR60-MM	NiMH	MM-1
LR60-1	Alkaline	No

- Center on-grade** provides an equal amount of grade information above and below on-grade when used with dozers, mini-graders, levellers and drag boxes
- Offset on-grade** provides more range above the on-grade position using the entire receiver to avoid over-digging
- Robust and built for jobsite environment – **2 year warranty**

Part No.	Batteries	Magnetic Mount	Remote Display
LR60W	NiMH	No	RD20
LR60W-MM	NiMH	MM-1	RD20
LR60W-2	NiMH	No	No

Receiver Accessories

Wireless Remote Display and Mounts



RD20 Wireless Remote Display



- Wireless remote mounts in the cab and displays grade information to the operator. Helps keep focus on the work and not on the receiver for higher productivity. Works with LR30W, LR50W & LR60W

Applications

- Remote Display is used when the receiver is behind the operator or is otherwise difficult to see, i.e. pulled drag boxes, scrapers, or trenchers
- Magnetic Mount is used to quickly attach receivers to backhoes and excavators

Part No.	Description
RD20	RD20 Remote Display
RDM-1	Mount, RD10 Swivel
010983	Cable, RD10 + RD20 Power, Lighter/power adapter
MM-1	Magnetic Mount for LR Receivers
DM-20	Bulldozer Bolt-On Mount

MM-1 Magnetic Mount










- Works with all LR receivers and quickly attaches to the dipper arms of excavators or backhoes
- Strong dual magnet packs will not slip on the machine
- Magnets are adjustable, can be positioned around hoses or piping, for quick installation and set-up
- Release lever aids in detaching from machine

DM-20 Dozer Bolt-On Mast



- Trimble Ready™ adjustable mount installs with no welding. The mast mount bolts instantly to machines that come from the factory Trimble Ready.

Product Application

Machine Type	Model	Application
Backhoes 	Use CR600 or LR20 or LR50	Excavating
Skid-steer Loader 	Use CR600 or LR20 or LR30 or LR30W (w/remote display)	Grading
Mini Excavator 	Use CR600 or LR20 or LR50 or LR50W (w/remote display)	Excavating
Skid-steer w/blade 	Use LR30 or LR50 or LR30W/LR50W (w/remote display)	Grading
Smaller Dozer 	Use LR30 or LR30W (w/remote display)	Grading
Larger Excavator 	Use LR60 or LR60W (w/remote display)	Excavating
Larger Dozer 	Use LR50 or LR50W (w/remote display)	Grading

Accessories and Components for Rotating Lasers

Cases



All rotating lasers are housed in a jobsite-tough carrying case with customized pockets to hold all accessories

1282-1970	LL100/HV101 Small Carrying Case
1282-1981	LL100/HV101 Large System Case
5289-0025	GL4X2N, LL300N, LL300S, LL400HV Small Carrying Case
5289-0026	HV302, HV302G Small Carrying Case
5289-0027	LL300N, LL300S, LL400HV HV302, HV302G System Carrying Case
Q104736	UL633/GL6X2 Carrying Case
1046-4750S	LL500 Carrying Case
CTO-1445-0860	GL7XX Carrying Case

Wall Mounts



M101 wall mount for HV101



M300 wall mount for HV301/HV301G



M302 Wall mount

Remote Control



RC601 Remote Control for HV101, HV301, HV301G, LL100, LL100N, LL300, LL300N

Laser Glasses



Model Number: Q100206
Increases the visibility of the laser beam under bright light conditions

Target



Model Number: 1176-6
Magnetic Visiline Target

- Optically enhanced, patented – increases beam visibility by 2.5 times.
- Half translucent, half reflective
- Magnetic mounting, magnet is permanently molded in for extra durability

Clamps



Model Number: M402
Batter Board Clamp

- Allows attachment of lasers or theodolites to batter boards for accurate vertical alignment
- 3 point contact for secure, sturdy grip
- Quick release clamp for quick instrument attachment



The 4852-16 Column Clamp is lightweight but stable. works with all instruments with a 5/8 x 11 base, ideal for lasers and theodolites.



M401
Tilting Base, Laser

Accessories and Components for Universal Laser



RC603N Combined Radio/IR Remote Control for all applications including pipe laying



SF601 Spot Finder for manual and automatic detection of the plumb beam



Q104865 Adapter for SF601 allows various setups



HL760 Laserometer to measure and display beam location



1243-0101 Sighting Scope

Pipe Laser Accessories



929 Blower



1017 Manhole Mount



936 Adjustable Large Pipe Target



Q104667 Rechargeable NiMH Pack, 10 Ah (DG613/DG813, UL633, GL6X2)



956 Optically Enhanced Target



1161 Heavy-Duty Wood Tripod



1263 Sighting Scope with Adapter



1244 T-Bar



1230/1237 Metal Invert Plate



P25 Cable w/ Cigarette Lighter Plug



1239 Extended Height Vertical Pole



Spot Finder SF803



P24 Pole Adapter for Spot Finder SF803



Transporter ST802



Heavy Duty Tripods

Applications

- Lasers
- Instruments

Key Features and Benefits

- Stable and accurate for most applications
- Choices of wood, aluminum and elevating base
- Telescopic legs allow setup at various heights
- 5/8 x 11 threaded post accommodates standard instruments and lasers
- 2161 packaged with LL500 kits



Part No.	Material	Extension
1161	Wood	Extends from 3 ft 2 in to 5 ft 3 in (96 cm to 160 cm)
2161	Aluminum	Extends from 3 ft 6 in to 6 ft 1 in (106 cm to 185 cm)
2162	Aluminum	Elevating Base - Extends from 4 ft 3 in to 7 ft 6 in (130 cm to 228 cm)

Medium Duty Tripods

Applications

- Lasers
- Instruments

Key Features and Benefits

- Sturdy and lightweight for many applications
- Telescopic legs allow setup at various heights
- 5/8 x 11 threaded post accommodates standard instruments and lasers



Part No.	Material	Packaged With
Q104025	Aluminum	LL100N, LL300S/N, HV101
5301-27-BLK-SP	Aluminum	AL Auto Level Kits

Specialty Tripod

Applications

- Lasers
- Instruments
- Machine control

Key Features and Benefits

- Tri-Max is a surveying grade tripod with certified accuracy
- Adjustable legs, portability, heavy-duty construction ensure long field life.



Part No.	Material	Extension
90550	Fiberglass	Extends to 5.9 ft (1.8 m)



Aluminum Grade Rods



Applications

- Grading
- Leveling
- Sitework
- Landscaping
- Foundations

Key Features and Benefits

- Aluminum leveling rods are made of a light and durable alloy
- Telescopic sections are anodized and silk-screened with moisture-resistant ink
- Each rod section uses sturdy polycarbonate buttons that lock each section when extended; the height gauge is on the back side
- Each rod includes a protective bag

Fiberglass Grade Rods



Applications

- Grading
- Leveling
- Sitework
- Landscaping
- Foundations

Key Features and Benefits

- CR Series Leveling Rods are perfect for laser detector mounting — no special brackets are required
- Rectangular shape with rounded back corners for better gripping
- SVR oval fiberglass rods are a surveying standard. Additional models available
- SVR 25 features a short collapsed length (58-1/2 inches) for convenient storage
- Fiberglass is non-conductive

Specialty Grade Rods



Applications

- Laser Grade Checking
- Leveling
- Sitework
- Landscaping
- Foundations

Key Features and Benefits

- Direct Elevation (DE) rods are made of aluminum
- Laser DE rods feature a side rail for attaching optional bracket for laser receiver
- Continuous tapes are stainless steel
- Latch in back locks the band in any position to match a benchmark elevation
- Wear resistant Delrin® end-rollers

Part No.	Length	Sections	Scale
GR151	15 ft	5	Tenths
GR152	15 ft	5	Inches
GR153	5 m	5	Metric

Part No.	Length	Sections	Scale
7321-40	13 ft	4	Inches
7301-40	13 ft	4	Tenths

Part No.	Length	Model	Scale
92021	13 ft	CR	Tenths
92022	13 ft	CR	Inches
92041	16 ft	CR	Tenths
92042	16 ft	CR	Inches
92031	20 ft	CR	Tenths
92032	20 ft	CR	Inches

Part No.	Length	Model	Scale
98010	25 ft	SVR	Tenths
98011	25 ft	SVR	Inches
98012	7.6 m	SVR	Metric

Part No.	Length	Sections	Scale
CTO-0319-4300	10 ft	2	Tenths
CTO-0319-4320	3 m	2	Metric
CTO-0319-4310	15 ft	2	Tenths
CTO-0319-4330	5 m	2	Metric



5079-069
DE Rod Bracket for HR detectors

5079-070
DE Rod Bracket for HL Laserometers

Laser Levels					Horizontal and Vertical Lasers		
	LL100N	LL300N	LL300S	LL500	HV101	HV302	HV302G
Accuracy	1/8 in @ 100 ft 3 mm @ 30 m (20 arc seconds)	3/32 in @ 100 ft 2.2 mm @ 30 m (15 arc seconds)	1/16 in at 100 ft 1.5 mm at 30 m (10 arc seconds)		1/8 in @ 100 ft 3 mm @ 30 m (20 arc seconds)	1/16 in at 100 ft 1.5 mm at 30 m (10 arc seconds)	1/16 in at 100 ft 1.5 mm at 30 m (10 arc seconds)
Operating diameter	1,150 ft (350 m)	1,650 ft (500 m)	2,600 ft (800 m)	1,650 ft (500 m)	Receiver: 1150 ft (350 m) Visible: 200 ft (60 m)	Receiver: 2600 ft (800 m) Visible: 330 ft (100 m)	Receiver: 2600 ft (800 m) Visible: 250 ft (75 m)
Self-leveling range	±5 degrees electronic servo self-leveling			±11 minutes	±5 degrees electronic servo self-leveling		
Power source	2 x D-cell Alkaline batteries	4 D-cell Alkaline Standard, NiMH optional			2 x D-cell Alkaline batteries	4 x D-cell NiMH standard, Alkaline backup	
Battery life	80 hrs Alkaline	90 hrs Alkaline, 45 hrs NiMH	60 hrs Alkaline, 47 hrs NiMH	175 hrs Alkaline, 100 hrs NiMH,	50 hrs Alkaline	60 hrs Alkaline, 45 hrs NiMH	25 hrs Alkaline 30 hrs NiMH
Water res.	Yes, IP54	Yes, IP66		Yes, IP54		Yes, IP66	Yes, IP66
Size L x W x H	8.5 x 6.7 x 6.0 in (22 x 17 x 15 cm)	10.7L x 7.7W x 7.9H in (27.2L x 19.7W x 20.1H cm)		10.8 x 7.5 x 7.5 in (27 x 19 x 19 cm)	8.5 x 6.7 x 6.0 in (22 x 17 x 15 cm)	10.7L x 7.7W x 7.9H in (27.2L x 19.7W x 20.1H cm)	10.7 x 7.7 x 7.9 in (27.2 x 19.7 x 20.1 cm)
Weight	3.3 lb (1.5 kg)	6.8 lbs (3.1 kg)		8 lb (3.6 kg)	3.3 lb (1.5 kg)	6.8 lbs (3.1 kg)	6.8 lbs (3.1 kg)
Warranty	3 Year, with instant exchange	5 Years			3 Year, with instant exchange	5 Years	3 Years

Laser Display Receivers				
	LR20	LR30 (W)	LR50 (W)	LR60 (W)
Number of Display Channels	5-Channel Display		5-Channel Display 6-Channel Display in excavating mode	7-Channel Display 8-Channel Display in excavating mode
Accuracy: Center On-Grade mode (Grading)	Fine: 0.20 in (5 mm) Standard: 0.40 in (10 mm) Wide: 0.80 in (20 mm)	Fine: 0.20 in (5 mm) Standard: 0.45 in (12 mm) Wide: 1.25 in (32 mm)	Fine: 0.20 in (5 mm) Standard: 0.40 in (10 mm) Wide: 0.80 in (20 mm)	Setup: 0.20 in (5 mm) Fine: 0.40 in (10 mm) Standard: 0.80 in (20 mm) Wide: 1.6 in (40 mm)
Accuracy: Offset On-Grade mode (Excavating)	Fine: 0.50 in (12 mm) Standard: 1.0 in (25 mm) Wide: 2.0 in (50 mm)	NA	Fine: 0.50 in (12 mm) Standard: 1.0 in (25 mm) Wide: 2.0 in (50 mm)	Setup: 0.25 in (6 mm) Fine: 0.50 in (12 mm) Standard: 1.0 in (25 mm) Wide: 2.0 in (50 mm)
ACE—Angle Compensation Mode	NA			Fine: 0.50 in (12 mm) Standard: 1.0 in (25 mm)
Blade-Tilt Accuracy	NA		± 0.5°, ± 1.5°, ± 2.5°	N/A
Plumb-Swing Accuracy	± 0.5°, ± 1.5°, ± 2.5°	NA	± 0.5°, ± 1.5°, ± 2.5°	Standard: 0.5 in (12 mm) Angle Compensation Mode: 1.0 in (25 mm)
Beam Reception	360 Degrees			
Vertical Reception	8 in (203.2 mm)	6.75 in (171 mm)		8.75 in (222 mm)
LED Battery Life Alkaline Bright / Dim NiMH Bright / Dim	35 hrs	50 hrs / 75 hrs 40 hrs / 50 hrs	45 hrs / 60 hrs 30 hrs / 45 hrs	45 hrs / 75 hrs 40 hrs / 50 hrs
Battery Recharge Time	3-4 hrs			
Size	9.5 x 4.38 x 1.85 in (24.1 x 11.1 x 4.7 cm)	13.5 x 5.6 x 5.9 in (34.3 x 14.2 x 14.9 cm)	13.5 x 5.6 x 5.9 in (34.3 x 14.2 x 14.9 cm)	15.5 x 5.6 x 5.9 in (39.4 x 14.2 x 14.9 cm)
Weight	2.5 lb (1.13 kg)	5.5 lb (2.5 kg)		6.0 lb (2.7 kg)
Receiver Warranty	2 Years			



Grade & Universal Lasers						
	GL412N/422N		GL612N / GL622N		UL633N	
Accuracy	1/16 in at 100 ft, 1.5 mm at 30 m (10 arc seconds)					
Operating diameter	2600 ft 800 m					
Self-leveling range	±5 degrees electronic servo self-leveling			±14 degrees electronic servo self-leveling		
Grade range	-10 to +15%		-25 to +25%		-25 to +25% X, Y, Z axis	
	Single	Dual	Single	Dual		
Power source	4 x D-cell NiMH battery pack					
Battery life	35 hrs NiMH 50 hrs Alkaline			35 hrs NiMH 40 hrs Alkaline		
Rotation speed	300, 600 rpm		GL612N: 300, 600, 750 rpm GL622N: 0 to 900 rpm		0 - 750 rpm	
Water resistant	Yes, IP66					
Size L × W × H	10.7L × 7.7W × 7.9H in (27.2 × 19.7 × 20.1 cm)			9.4 × 5.9 × 11 in (24 × 15 × 28 cm)		
Weight	6.8 lbs (3.1 kg)					
Warranty	5 Years			5 Years		5 Years
Wireless Remote Specifications						
Remote control type 2-way communication	RC402N			RC602N		RC603N
Battery life	130 hrs continuous 1 year normal use					
Range	330 ft (100 m)			490 ft (150 m)		

Laser Tools					
	LP30 / LP50	LT20	LT52	LT56	LT58
Self-level range	±4° from level		±3° from level	±4° from level	
Working range - Visible	100 ft (30m)	100 ft (30m)	100 ft (30m) Lines 200 ft (60m) Points	80 ft (25 m)	Green beam 100 ft (30 m) Red beams 80 ft (25 m)
With detector	N/A	N/A	300 ft (90 m)	200 ft (65 m)	N/A
Accuracy	± 1/8 in @ 35 ft (3 mm @ 12 m)	± 1/8 in @ 35 ft (3 mm @ 12 m)	± 1/8 in @ 50 ft (2.5 mm @ 15 m)	± 1/8 in @ 50 ft (2.5 mm @ 15 m)	
Battery type	2 x AA	3 x AA	4 x AA	Lithium-Ion 7200 mAh, 3.7 V	
Battery life	20 hrs	20 hrs	56 hours points 11 hours lines	25 hrs all beams	19 hrs Green beam 11 hrs all beams
Dimensions	3.5x4.1x2.4 in 8.9x10.4x6.1 cm	4.3x2.3x4.1 in 11.0x5.8x10.4 cm	5.7 x 3.0 x 5.9 in 14.5x7.8x13.8 cm	4.6x6.0x3.3 in 15.2x11.6x8.4 cm	
Weight	0.69 lb (0.31 kg)	0.8 lb (0.35 kg)	1.5 lb. (0.68 kg)	1.48 lb (0.67 kg)	
Warranty	3 Years, with instant exchange				

Pipe Lasers		
	DG813	DG613
Grade range	-12% to +40%	
Self-leveling range	Complete grade range (no rough leveling required) also automatic compensated in the cross axis	
Line range	20° ±1°	
Line center	Yes	
Menu with variable settings	Yes	
Line set/check / Line alert	Yes	
Temperature compensation	Yes	
Spot Align, Spot Match, Spot Lok, Spot Search with SF803	Yes	No
Waterproof	Continuous submersion at 10 ft (3 m)	
Laser classification / output	3A/3R / 4.5–5 mW, optional 2 / <1 mW	
Weight	3.98 kg	
Length	9.8 in (25 cm)	
Diameter	5.3 in (13.5 cm)	
Battery type and life	NiMH / 40 hrs with daily setup at 20° C	
Battery pack	Sealed (NiMH), Sealed removable (alkaline)	
Warranty	5 Years	5 Years
Wireless remote specifications		
Functionality	RC803 -Radio-/IR-Remote Control offers all Laserfunctions	
Through the pipe range	150 m	
Front / Over the top range	130 m	
Battery life	1 Year	

HR / HL Laser Receivers								
	HR150U	HR220	HR320	HL450	HL700	HL750	HL760	HL760U
Working Radius	3 - 100 ft (1 - 10 m)	3 - 100 ft (1 - 10 m)	3 - 650 ft (1 - 200 m)	3 - 650 ft (1 - 200 m)	3 - 1500 ft (1 - 460 m)	3 - 1500 ft (1 - 460 m)	3 - 1500 ft (1 - 460 m)	3 - 1500 ft (1 - 460 m)
Laser Detection Height	2 in (50 mm)	2 in (50 mm)	2 in (50 mm)	4 in (102 mm)	5 in (127 mm)	5 in (127 mm)	5 in (127 mm)	5 in (127 mm)
Radio Working radius	N/A	N/A	N/A	N/A	N/A	260 ft (80 m)	720 ft (220 m)	720 ft (220 m)
Accuracy Range (Deadband)	1/8 in (3 mm)	1/16 in (2 mm)	1/16 - 1/4 in (2 - 6 mm)	1/64 - 3/8 in 0.5mm - 10mm	1/64 - 3/8 in 0.5mm - 10mm	1/64 - 3/8 in 0.5mm - 10mm	1/64 - 3/8 in 0.5mm - 10mm	1/64 - 3/8 in 0.5mm - 10mm
LED Grade Indicators	Green - On Grade Red - High Blue - Low	N/A	N/A	N/A	Green - On Grade Red - High Blue - Low	Green - On Grade Red - High Blue - Low	Green - On Grade Red - High Blue - Low	Green - On Grade Red - High Blue - Low
“Fingerprinting”	No	No	No	No	No	No	Yes	Yes
Power Supply	2 x AA Alkaline	2 x AA Alkaline	2 x AA Alkaline	2 x AA Alkaline	2 x AA Alkaline	2 x AA Alkaline	2 x AA Alkaline	2 x AA Alkaline
Battery Life	50+ hrs	50+ hrs	70+ hrs	60+ hrs	60+ hrs	60+ hrs	60+ hrs	60+ hrs
Auto Shut Off	30 min	30 min	30 min	30 min - 24 hr	30 min - 24 hr	30 min - 24 hr	30 min - 24 hr	30 min - 24 hr
IP Rating	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Warranty	1 Year	1 Year	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years

GL700 Series Lasers			
Model	GL710	GL720	GL722
Servo Deadband Accuracy	4.6 arc seconds	4.6 arc seconds	4.6 arc seconds
Range (Diameter)	3,000 ft (900 m)	3,000 ft (900 m)	3,000 ft (900 m)
Axis Grade Range X	NA	-10 to +10%	-10 to +10%
Axis Grade Y	-0.5 to +25%	-0.5 to +25%	-0.5% to +25%
Grade Resolution	0.001%	0.001%	0.001%
Power Source	NiMH 6 x D cell	NiMH 6 x D cell	NiMH 6 x D cell
Battery Life	30 hrs	30 hrs	30 hrs
Rotation Speeds	300, 600, 900 rpm	300, 600, 900 rpm	300, 600, 900 rpm
Radio Remote	No	No	Yes
Auto Axis Alignment	No	No	Yes
Grade Match Mode	No	No	Yes
PlaneLok	No	No	Yes
Water Resistant	Completely sealed and waterproof		
Size L x W x H	7.75 x 10.0 x 11.75 in (20 x 25 x 30 cm)		
Weight	18.5 lb (8.4 kg)		
Wireless Remote Specifications			
General	Radio Type, 2.4 GHz digital, encrypted to each laser		
Operating Range	750 ft (225 m) general operation		500 ft (150 m) automatic alignment
Battery Life	100 hrs		



Automatic Levels					
	AL20M	AL24A	AL24M	AL28M	AL32A
Magnification	20×	24×		28×	32×
Accuracy	±2.5 mm*	±2.0 mm*		±1.5 mm*	±1.0 mm*
Aperture	30 mm				36 mm
Shortest focus	0.6 m				
Compensator dampening	Magnetic	Air	Magnetic		Air
Warranty	3 Year, with instant exchange				
*Note: Standard deviation according to DIN 18723 on one kilometer of double leveling					

DET-2											
Telescope		Optical Plummet		Angle Measuring System		Vials		Button Functions		Other Specs	
Image	Erect	Image	Erect	Minimum reading	1" or 5"	Tubular	30"/2 mm	ON / OFF	Power	Dust/Water	IP-54
Mag.	30X	Mag.	3X	Precision	2"	Circular	8/2 mm	R	Backlight / Illumination on / off	Operating temperature	-20°C to +50°C
Aperture	45 mm	Angle of view	5°	Units	Deg / mil / gon / V%			HOLD	Angle hold	Size - instrument	164 x 154 x 340 mm
Focus distance	1.45 m to ∞	Focusing range	0.5 m ~ ∞	Display	Dual, Large Character LCD tilt sensor			R/L	Clockwise / Counterclockwise measurement	Weight - instrument	4.5 kg
Field of view	1° 30'	Reticle type	Crosshair	Auto compensation	User Set On / Off ±3' Range			OSET	Zero reset of horizontal angle	Warranty	1 Year
Stadia Ratio / constant	100 / 0							V%	Convert vertical degrees to %		

QM Series Quick Measure Lasers			
Specification	QM55	QM75	QM95
Range	50 m (165 ft)	70 m (230 feet)	200 m (650 feet)
Accuracy	± 1.5 mm (± 1/16 in)		± 1.0 mm (± 1/24 in)
Units of measure	m, ft, in, ft-in		m, mm, ft, in, yds
Automatic shut off	3 minutes		10 minutes
Battery life	5000+ measures		8000 measures
Power supply	2 x AAA 1.5V		2 x AA 1.5V
Drop performance	1.5 m (5 ft)		1.5 m (5 ft)
Dust & Water resistance	IP54	IP55	IP54
Laser type / power	635nm visible red / < 1 mW		635nm visible red / < 1 mW
Dimensions	52 x 28 x 125 mm (2.0 x 1.1 x 4.9 in)	34 x 42 x 125 mm (1.3 x 1.6 x 4.9 in)	62 x 28 x 120 mm (2.4 x 1.2 x 4.7 in)
Weight with batteries	187 g (6.6 oz)	144 g (5.1 oz)	217 g (7.7 oz)
Warranty	3 Years		

Spectra Precision Laser Applications	Laser Pointers - LP30 - LP50 - LT52	Line Generator - LT20 - LT52 - LT56 - LT58	Handheld Distance Measuring Device - QM55 - QM75 - QM95	Laser Levels - LL100N - LL300N - LL300S - LL500 Optical Levels - AL20 - AL24 - AL28 - AL32	Horizontal Vertical Lasers - HV101 - HV302 - HV302G	Grade & Universal Lasers - GL412N - GL422N - GL612N - GL622N - GL710 - GL720 - GL722 - UL633N
	General Construction					
Forms, footings and foundations				○	○	○
Septic tank or swimming pools, decks and terraces		○		○	○	○
Estimating cut and fill				○	○	○
Checking building square and area		○	○		○	○
Matching existing slopes and grades				○	○	○
Checking elevations				○	○	○
Checking elevations of sub-base and sub-grade				○	○	○
Checking and setting elevations for sports fields, steep slopes, ramps, and drainage						○
Vertical alignment and plumb such as anchor bolt and form alignment		○			○	○
Interior						
Locating finished floor levels		○		○	○	
Laying out interior walls	○	○			○	
Installing ceiling grids	○	○			○	
Short-run vertical alignment		○			○	
Squaring and layout of partitions, walls and tile floors	○	○			○	
Plumb reference and point transfers from below to above, such as walls, door frames, and lighting locations measured from the floor layout to ceiling	○	○			○	
Level reference used for leveling cabinets, counter tops, windows, decks ceilings and chair rails	○	○			○	
Measuring distances, depths and heights			○			